


NOTES:

1. ALL CHAIN LINK FENCE SHALL BE TYPE 1 SEVENTY-TWO INCH (72") AS PER WSDOT STANDARD PLAN L-2, BOTTOM AND TOP, BRACE POST AND CHAIN LINK. BOTTOM AND TOP SHALL HAVE A BLACK VINYL COATING. SPECIFICATIONS - NOTE 3.
2. CHAIN LINK GATE SHALL BE AS SHOWN IN WSDOT STANDARD PLAN L-3. PER SECTION 9-16.1(1) AND AS AMENDED BY NOTE #3.
3. SECTION 9-16.1(1) SHALL BE SUPPLEMENTED WITH THE FOLLOWING: IN ADDITION TO MEETING THE COATING AND MATERIAL REQUIREMENTS OF SECTION 9-16 OF THE STANDARD SPECIFICATIONS, ALL FENCE AND GATE PARTS OF FENCE NOTED AS VINYL COATED SHALL HAVE A BLACK VINYL CLAD COATING AND ALL PARTS MATCH IN COLOR. COATING OF FABRIC SHALL BE EXTRUDED/BONDED OF 0.015 INCH THICKNESS. COATING FOR POSTS AND RAILS SHALL BE 3 MIL POWDER COAT. ALL BOLTS NUTS, AND WIRE TIES SHALL BE POWDER COATED TO MATCH THE COLOR OF THE FENCE FABRIC.



1	Changed Fence to Type 1	7/14/06
Rev No.	Revisions	Date
Approved: 		June 17, 2005
City Engineer		Date
MISCELLANEOUS STANDARD DETAIL		



Dwg No:


M1

SWING GATE AND FENCE DETAILS

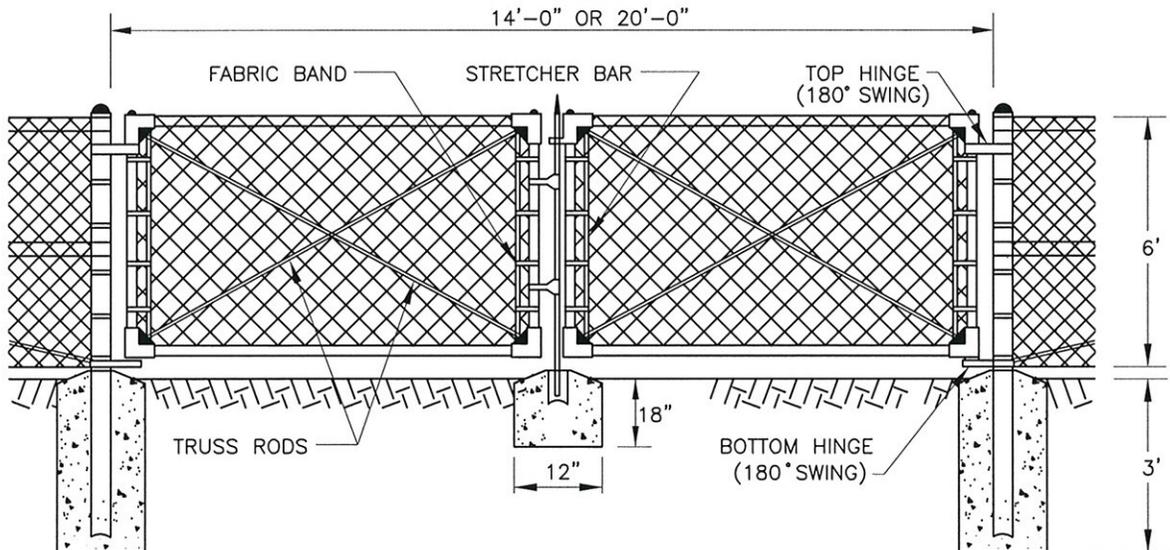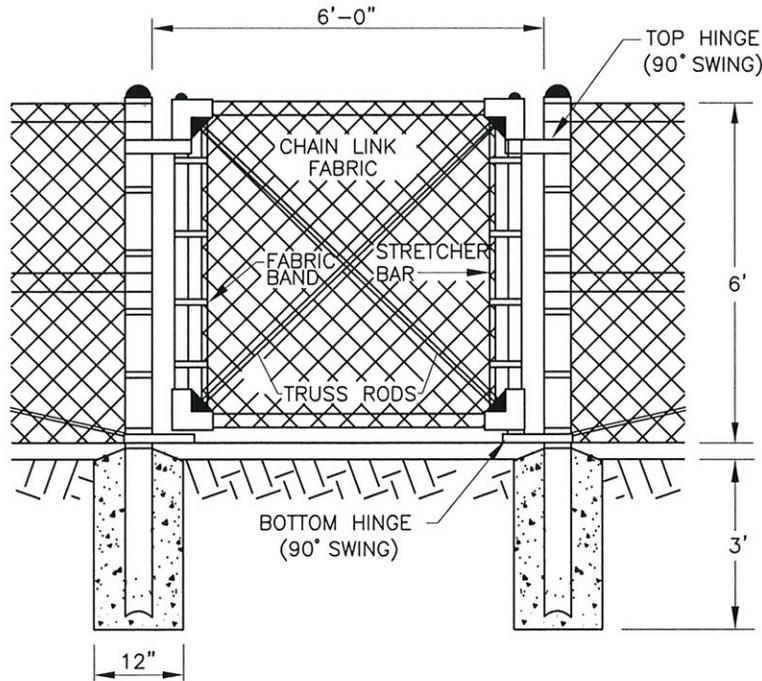

NOTES:

1. FENCE FABRIC SHALL BE SECURED TO GATE FRAMES WITH TWISTED AND BARBED SELVAGE ALONG TOP EDGE FOR TYPE 1 CHAIN LINK FENCE INSTALLATION.
2. MINIMUM POST LENGTH: 8'-8"
3. SECTION 9-16.1(1) SHALL BE SUPPLEMENTED WITH THE FOLLOWING: IN ADDITION TO MEETING THE COATING AND MATERIAL REQUIREMENTS OF SECTION 9-16 OF THE STANDARD SPECIFICATIONS, ALL FENCE AND GATE PARTS OF FENCE NOTED AS VINYL COATED SHALL HAVE A BLACK VINYL CLAD COATING AND ALL PARTS MATCH IN COLOR. COATING OF FABRIC SHALL BE EXTRUDED/BONDED OF 0.015 INCH THICKNESS. COATING FOR POSTS AND RAILS SHALL BE 3 MIL POWDER COAT. ALL BOLTS, NUTS, AND WIRE TIES SHALL BE POWDER COATED TO MATCH THE COLOR OF THE FENCE FABRIC.

1	Changed Gate to Type 1	7/14/06
Rev No.	Revisions	Date
Approved: 	June 17, 2005	Date
City Engineer		
MISCELLANEOUS STANDARD DETAIL		



Dwg No:

M1

**SWING GATE AND
FENCE DETAILS**